

IBG UV Patch - short liner system




Control unit for UV-illumination
and pressure (inflating)

**The UV-Patch-System allows the rehabilitation
of damaged pipe sections in lengths up to 1 meter (40")**

Fields of application:

- defective pipe connections
- cracks of pipes
- broken fragments
- selective corrosion
- root intrusion
- infiltration and exfiltration

OVERVIEW UV-UNIT

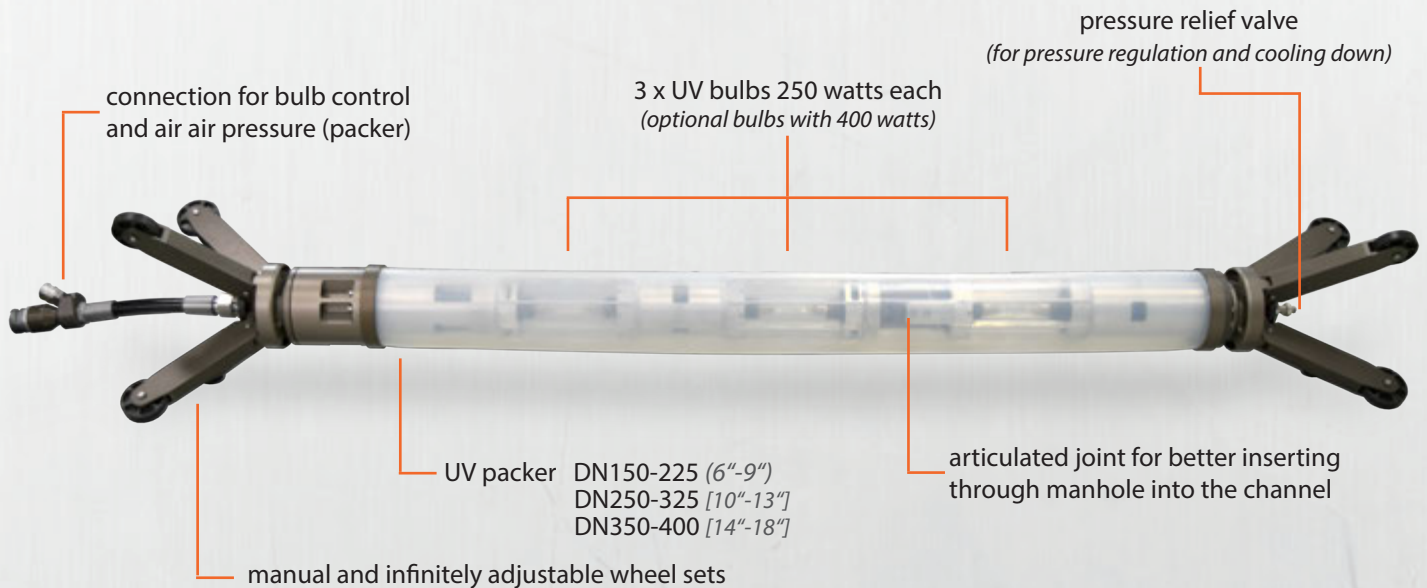

System components:

- control unit for UV light and compressed air (inflation)
- 50 meters (164 feet) hose reel (optional 80 meters / 262 feet)
- carriage with control unit and camera (optional)
- compressed air hose
- 2 x wheel sets for DN150 - 600 (6" - 24")
- 1 x UV packer DN150 - 225 / 1 x UV packer DN250 - 325 / 1 x UV packer DN350 - 450
- accessories package
- 1 x Replacement packer sleeve per size
- 3 x Replacement UV lamps

Advantages and features of IBG UV Patch System:

- max. occupancy with short liners up to 100 cm (40")
- 3 x UV lamps (250 watts each)
- articulated joint for better inserting through manhole into the pipe
- curing time of only 8 minutes